

FGL



FGL Battery Range

+
FIAMM.COM

FIAMM
+ — — -

Reserve
Power Solutions

THE FGL RANGE IS DESIGNED TO SATISFY A WIDE RANGE OF APPLICATIONS REQUIRING HIGH LEVEL OF SECURITY AND RELIABILITY.

FGL BATTERIES OFFER GOOD PERFORMANCE WITH ANY DISCHARGE PROFILE. FGL BLOCs CAN BE INSTALLED IN CABINETS OR RACKS. FGL USES PROVEN VRLA TECHNOLOGY WITH 99% INTERNAL RECOMBINATION EFFICIENCY, IS NON-SPILLABLE AND MAINTENANCE FREE THEREFORE REQUIRES NO TOPPING UP OF ELECTROLYTE DURING ITS FLOAT- LIFE. FGL RANGE IS NON-HAZARDOUS FOR AIR/SEA/RAIL/ROAD TRANSPORTATION AND IS 100% RECYCLABLE. FGL HAS A SELF-DISCHARGE RATE LESS THAN 2% PER MONTH, GUARANTEEING LONG SHELF-LIFE.



MAIN APPLICATIONS:



SECURITY SYSTEMS AND EMERGENCY LIGHTING



RENEWABLE ENERGY



LIGHT TRACTION



LEISURE

SPECIFICATIONS

High purity lead calcium tin grid plates, designed to resist corrosion and provide short recharge time

VRLA AGM technology using low resistance high microporous fiberglass separators

Leak resistant post seal, threaded female M5/M6/M8 terminals with high conductivity and maximum torque resistance

One-way safety relief valves allow gas to escape and prevent the ingress of oxygen.


Flame arrestors prevent sparks or flames entering the battery

ABS plastics designed for superior mechanical strength

Heat sealed box to lid weld for superior integrity

Installation in any orientation (excluding permanently inverted)

TECHNOLOGY

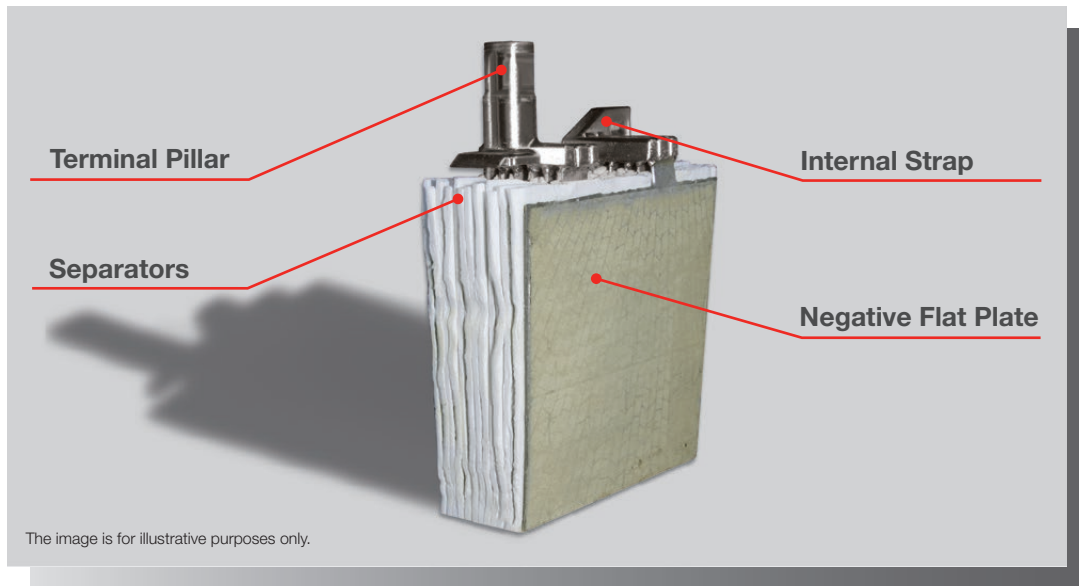

FIAMM FGL RANGE USE AGM (ABSORBED GLASS MAT) TECHNOLOGY. THE ELECTROLYTE IS ABSORBED IN FIBERGLASS SEPARATORS WITH 99% INTERNAL GAS RECOMBINATION EFFICIENCY. BLOCS ARE GRANTS NON-SPILLABLE AND MAINTENANCE FREE THEREFORE REQUIRES NO TOPPING UP OF ELECTROLYTE DURING ITS WHOLE LIFE. LOW SELF-DISCHARGE ALLOWS 6 MONTHS SHELF LIFE.

BATTERY TYPE	NOMINAL VOLTAGE (V)	CAPACITY (Ah) 20 hrs to 1.75 VPC at 25°C	NOMINAL DIMENSIONS (mm)				TYPICAL WEIGHT (kg)	TERMINAL TYPE
			Length	Width	Height	Tot. Height*		
12FGL17	12	17	181	76	167	167	6.0	Round M5
12FGL27	12	27	166	175	125	125	9.0	Round M5
12FGL33	12	33	196	130	159	163	12	Round M6
12FGL42	12	42	198	165	170	170	14	Round M6
12FGL55	12	55	229	138	207	212	18	Round M6
12FGL70	12	70	272	166	191	194	22	Round M6
12FGL70/L	12	70	350	166	176	176	22	Round M6
12FGL80	12	80	259	168	208	213	25	Round M8
12FGL100	12	100	329	172	217	222	32	Round M6
12FGL120	12	120	407	173	221	226	38	Round M8
12FGL150	12	150	483	170	219	219	45	Round M8
12FGL205	12	205	499	226	235	235	63	Round M8

*Tot. Height = total height including terminals

ELECTRICAL CHARACTERISTICS

Float Voltage: 2.26 V/cell at 25°C

Boost Voltage: 2.35 V/cell

Float Voltage Compensation with Temperature: -2.5 mV/cell/°C

Self-Discharge at 25°C: <2%/month

STANDARDS

IEC 60896 Part 21 - VRLA methods of testing

IEC 60896 Part 22 - VRLA requirements

Eurobat "10-12 years LONG LIFE"

UL Recognized


CERTIFICATIONS

ISO 9001
Quality Management System

ISO 14001
Environmental Management System

OHSAS 18001
Workplace Safety & Health


DISCHARGE CURVES at different current / final voltage (at 25°C)

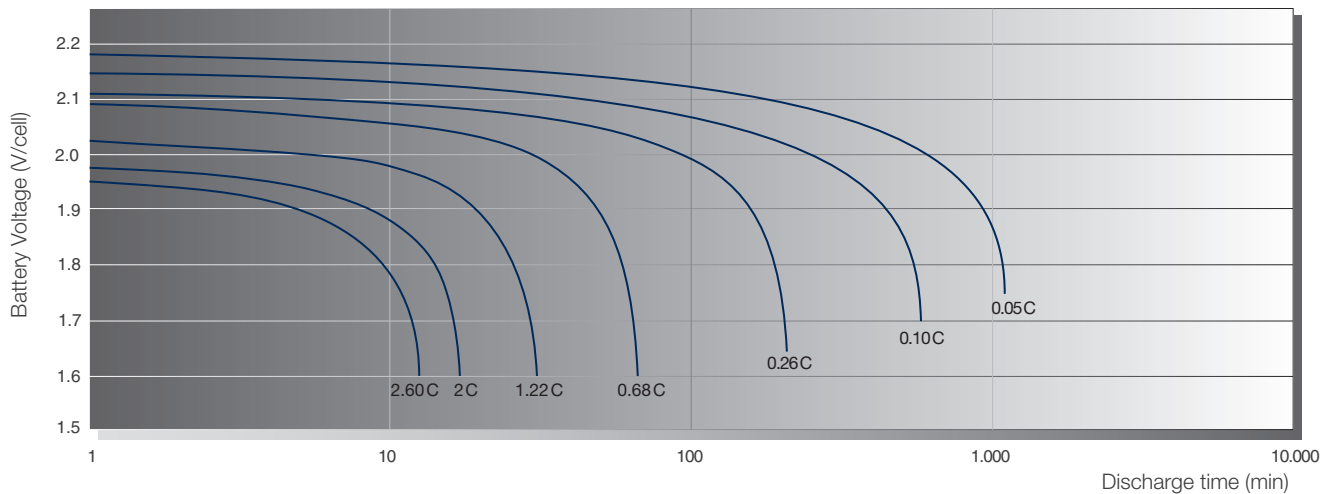

The above discharge curves are typical. For more detailed information please see the specific product sheets.


TYPICAL CHARGE CURVES

Battery Voltage and Charge Time for Standby Use (at 25°C)

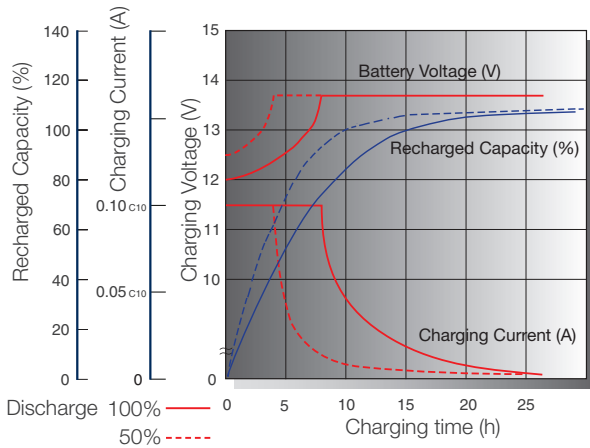

STORAGE

Capacity loss during storage at various temperatures

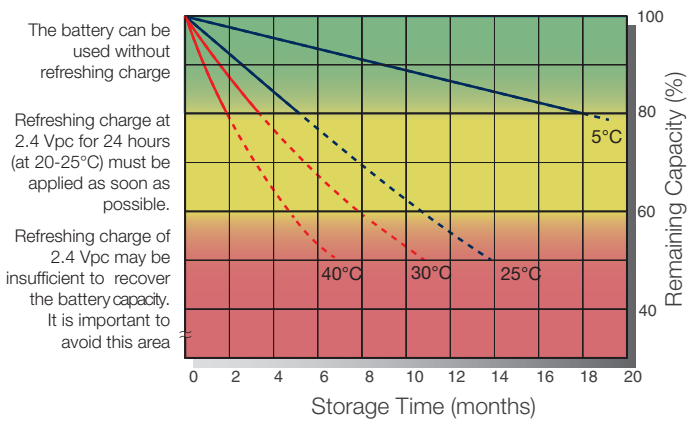

FIAMM S.p.A.
Viale Europa, 75 - 36075 Montecchio Maggiore (VI) - ITALY
TEL +39 0444 709311 - Fax +39 0444 694178

e-mail: info.standby@fiamm.com
www.fiamm.com
f [fiamm.batteries](https://www.facebook.com/fiamm.batteries)
t [fiambatteries](https://twitter.com/fiambatteries)
y [youtube.com/user/FIAMMvideo](https://www.youtube.com/user/FIAMMvideo)